
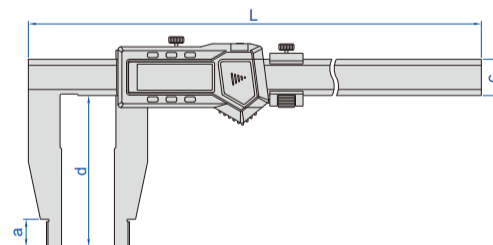


数据  
传输畅销  
产品

1106-501

- 符合JJG通用卡尺国家计量检定规程, 200mm及300mm爪长符合JB/T长量爪卡尺国家机械行业标准
- 不防水
- 分辨率: 0.01mm/0.0005"
- 按键功能: 开/关, 置零, 公/英制转换, 相对/绝对测量转换, 设置初始值
- CR2032电池
- 不锈钢尺身
- 可选附件:  
数显大卡尺附件 (型号**6145-500/6146-500B**, 仅适用于c=24mm的卡尺)



带数据接口

(mm)

型号	测量范围	精度	L	a	c	d	数据传输(选配)
1106-301	0-300mm/0-12"	±0.05mm	420	18	24	100	7315-22需选配接收器页码9, 7302-22页码23
1106-302	0-300mm/0-12"	±0.05mm	475	18	24	150	
1106-451	0-450mm/0-18"	±0.05mm	625	18	24	100	
1106-501	0-500mm/0-20"	±0.05mm	675	18	24	100	
1106-502	0-500mm/0-20"	±0.06mm	675	18	24	150	
1106-503	0-500mm/0-20"	±0.06mm	675	24	31	200	
1106-505	0-500mm/0-20"	±0.08mm	675	24	42	300	7315-20B需选配接收器, 7302-SPC1A
1106-601	0-600mm/0-24"	±0.05mm	770	18	24	100	7315-22需选配接收器页码9, 7302-22页码23
1106-602	0-600mm/0-24"	±0.06mm	770	18	24	150	
1106-603	0-600mm/0-24"	±0.06mm	825	24	31	200	
1106-802	0-800mm/0-32"	±0.07mm	1025	24	31	150	
1106-1002	0-1000mm/0-40"	±0.07mm	1220	24	31	150	7315-20B需选配接收器, 7302-SPC1A
1106-1003	0-1000mm/0-40"	±0.08mm	1220	24	31	200	
1106-1005	0-1000mm/0-40"	±0.10mm	1220	24	42	300	
1106-1502	0-1500mm/0-60"	±0.11mm	1780	24	42	150	
1106-1503	0-1500mm/0-60"	±0.12mm	1780	24	42	200	
1106-2002	0-2000mm/0-80"	±0.14mm	2290	24	42	150	
1106-2003	0-2000mm/0-80"	±0.14mm	2290	24	42	200	
1106-2502	0-2500mm/0-100"	±0.22mm	2800	24	42	150	
1106-3002	0-3000mm/0-120"	±0.26mm	3300	24	42	150	

内置无线(需选配接收器, 型号7315-2/3/6/7/8/9)

型号	测量范围	精度	L	a	c	d
1106-301WL	0-300mm/0-12"	±0.05mm	420mm	18mm	24mm	100mm
1106-302WL	0-300mm/0-12"	±0.05mm	420mm	18mm	24mm	150mm
1106-451WL	0-450mm/0-18"	±0.05mm	625mm	18mm	24mm	100mm
1106-501WL	0-500mm/0-20"	±0.05mm	675mm	18mm	24mm	100mm
1106-502WL	0-500mm/0-20"	±0.06mm	675mm	18mm	24mm	150mm
1106-601WL	0-600mm/0-24"	±0.05mm	770mm	18mm	24mm	100mm
1106-602WL	0-600mm/0-24"	±0.06mm	770mm	18mm	24mm	150mm