



数显大尺寸内卡规




2335-155

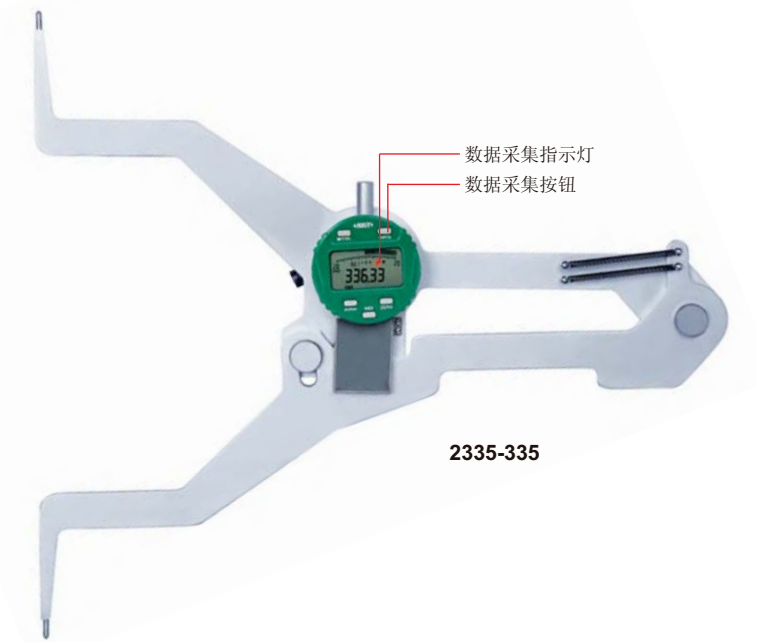

2335-335

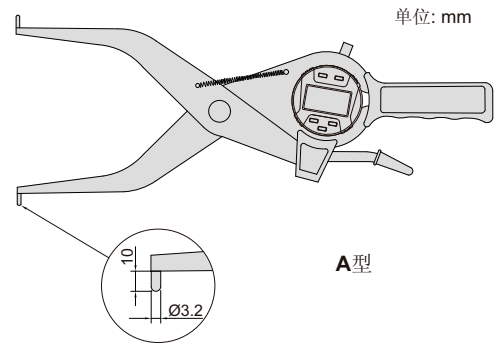

A型

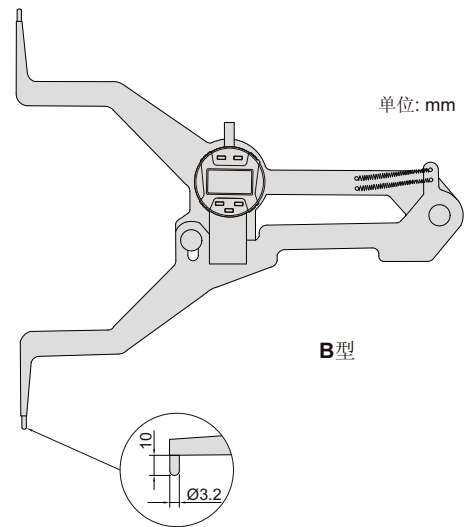

B型

- 符合JJF带表卡规国家计量技术规范
- 硬质合金测头
- 模拟指针显示
- 带采集按钮与指示灯
- 显示屏可旋转320°
- 按键功能: 开/关, 置零, 最大值/最小值/跳动, 设置初始值, 设置公差并显示Go/No-Go, 公/英制转换, 测量方向转换, 数据输出, 相对/绝对测量转换
- CR2032电池, 自动关机(关机时间可调)
- 数据传输
- 可选附件: 数据传输线(型号7315-50M, 7302-50M)

型号	测量范围	分度值	精度	类型	L
2335-155	135-155mm/5.32-6.10"	0.01mm/0.0005"	±0.04mm	A	<200mm
2335-175	155-175mm/6.10-6.89"	0.01mm/0.0005"	±0.04mm	A	<200mm
2335-195	175-195mm/6.88-7.68"	0.01mm/0.0005"	±0.04mm	A	<200mm
2335-215	195-215mm/7.68-8.46"	0.01mm/0.0005"	±0.04mm	A	<200mm
2335-235	215-235mm/8.46-9.25"	0.01mm/0.0005"	±0.04mm	A	<200mm
2335-255	235-255mm/9.25-10.04"	0.01mm/0.0005"	±0.04mm	A	<200mm
2335-275	255-275mm/10.04-10.83"	0.01mm/0.0005"	±0.04mm	A	<200mm
2335-295	275-295mm/10.83-11.61"	0.01mm/0.0005"	±0.04mm	A	<200mm
2335-315	295-315mm/11.61-12.40"	0.01mm/0.0005"	±0.04mm	A	<200mm
2335-335	315-335mm/12.40-13.19"	0.01mm/0.0005"	±0.04mm	B	<200mm
2335-355	335-355mm/13.19-13.98"	0.01mm/0.0005"	±0.04mm	B	<200mm
2335-375	355-375mm/13.98-14.76"	0.01mm/0.0005"	±0.04mm	B	<200mm

