

IP65  
防尘防水

数据  
传输

检验证书

# 数显两点/三点内径千分尺



3127-5C




3127-12C




3127-40C




3127-125C




**A型**  
2-6mm,  
硬质合金测量面  
两点式



**B型**  
6-12mm,  
钢测量面  
三点式

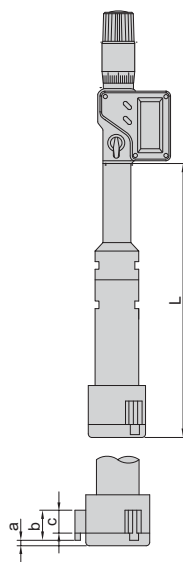

**C型**  
12-50mm,  
硬质合金测量面  
三点式

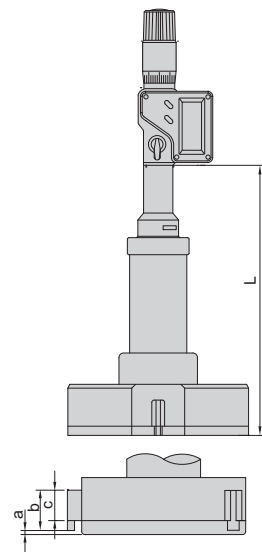

**D型**  
50-300mm,  
硬质合金测量面  
三点式

千分尺底座和夹持块(选配)




校对环规



2-100mm标配环规  
100-300mm不配环规, 需另购

延长杆(标配)



- 符合JJF测量内尺寸千分尺国家计量技术规范
- 防尘/防水等级: IP65
- 按键: 开/关, 初始值设置, 公/英制转换, 数据输出
- 数据传输
- 自动关机
- 棘轮测力
- 可选附件: 数据传输线(型号7315-31, 7302-30), 校对环规(型号6312), 千分尺底座和夹持块(型号6301和6301-2)



3127-202C

单支

(mm)

型号	测量范围	类型	分辨率	精度	校对环规	延长杆(标配)	L	a	b	c
3127-2C*	2-2.5mm/0.08-0.10"	A(两点)	0.001mm/0.00005"	6μm	Ø2.5(标配)	—	12	—	—	—
3127-3C*	2.5-3mm/0.10-0.12"	A(两点)	0.001mm/0.00005"	6μm	Ø2.5(标配)	—	12	—	—	—
3127-4C*	3-4mm/0.12-0.16"	A(两点)	0.001mm/0.00005"	6μm	Ø4(标配)	—	22	—	—	—
3127-5C*	4-5mm/0.16-0.20"	A(两点)	0.001mm/0.00005"	6μm	Ø5(标配)	—	22	—	—	—
3127-6C*	5-6mm/0.20-0.24"	A(两点)	0.001mm/0.00005"	6μm	Ø6(标配)	—	22	—	—	—
3127-8C*	6-8mm/0.24-0.31"	B(三点)	0.001mm/0.00005"	4μm	Ø6(标配)	100	57	1.5	2.5	—
3127-10C*	8-10mm/0.31-0.39"	B(三点)	0.001mm/0.00005"	4μm	Ø8(标配)	100	57	1.5	2.5	—
3127-12C*	10-12mm/0.39-0.47"	B(三点)	0.001mm/0.00005"	4μm	Ø10(标配)	100	57	1.5	2.5	—
3127-16C*	12-16mm/0.47-0.63"	C(三点)	0.001mm/0.00005"	4μm	Ø16(标配)	150	99	0.5	6	4.5
3127-20C*	16-20mm/0.63-0.79"	C(三点)	0.001mm/0.00005"	4μm	Ø16(标配)	150	99	0.5	6	4.5
3127-25C*	20-25mm/0.79-0.98"	C(三点)	0.001mm/0.00005"	4μm	Ø25(标配)	150	105	0.5	8	6
3127-30C*	25-30mm/0.98-1.18"	C(三点)	0.001mm/0.00005"	4μm	Ø25(标配)	150	105	0.5	8	6
3127-40C*	30-40mm/1.18-1.57"	C(三点)	0.001mm/0.00005"	4μm	Ø40(标配)	150	110	0.5	14	12
3127-50C*	40-50mm/1.57-1.97"	C(三点)	0.001mm/0.00005"	5μm	Ø40(标配)	150	110	0.5	14	12
3127-63C*	50-63mm/1.97-2.48"	D(三点)	0.001mm/0.00005"	5μm	Ø62(标配)	150	127	0.5	17.5	14.5
3127-75C*	62-75mm/2.44-2.95"	D(三点)	0.001mm/0.00005"	5μm	Ø62(标配)	150	127	0.5	17.5	14.5
3127-88C*	75-88mm/2.95-3.46"	D(三点)	0.001mm/0.00005"	5μm	Ø87(标配)	150	127	0.5	17.5	14.5
3127-100C*	87-100mm/3.43-3.94"	D(三点)	0.001mm/0.00005"	5μm	Ø87(标配)	150	127	0.5	17.5	14.5
3127-125C*	100-125mm/3.94-4.92"	D(三点)	0.001mm/0.00005"	6μm	选配	150	175	0.9	29	25
3127-150C*	125-150mm/4.92-5.91"	D(三点)	0.001mm/0.00005"	6μm	选配	150	175	0.9	29	25
3127-175C*	150-175mm/5.91-6.89"	D(三点)	0.001mm/0.00005"	7μm	选配	150	175	0.9	29	25
3127-200C*	175-200mm/6.89-7.87"	D(三点)	0.001mm/0.00005"	7μm	选配	150	175	0.9	29	25
3127-225C	200-225mm/7.87-8.86"	D(三点)	0.001mm/0.00005"	8μm	选配	150	175	0.9	29	25
3127-250C	225-250mm/8.86-9.84"	D(三点)	0.001mm/0.00005"	8μm	选配	150	175	0.9	29	25
3127-275C	250-275mm/9.84-10.83"	D(三点)	0.001mm/0.0001"	9μm	选配	150	175	0.9	29	25
3127-300C	275-300mm/10.83-11.81"	D(三点)	0.001mm/0.0001"	9μm	选配	150	175	0.9	29	25

套装

型号	测量范围	包含的千分尺	校对环规(标配)	延长杆(标配)
3127-232C*	2-3mm/0.08-0.12"	2-2.5mm, 2.5-3mm	Ø2.5mm	—
3127-363C*	3-6mm/0.12-0.24"	3-4mm, 4-5mm, 5-6mm	Ø4mm, Ø5mm, Ø6mm	—
3127-123C*	6-12mm/0.24-0.47"	6-8mm, 8-10mm, 10-12mm	Ø6mm, Ø8mm, Ø10mm	100mm
3127-202C*	12-20mm/0.47-0.79"	12-16mm, 16-20mm	Ø16mm	150mm
3127-504C*	20-50mm/0.79-1.97"	20-25mm, 25-30mm, 30-40mm, 40-50mm	Ø25mm, Ø40mm	150mm
3127-1004C*	50-100mm/1.97-3.94"	50-63mm, 62-75mm, 75-88mm, 87-100mm	Ø62mm, Ø87mm	150mm

\*带生产厂检验证书