


直进式薄片千分尺

测头不旋转



3232-25AC

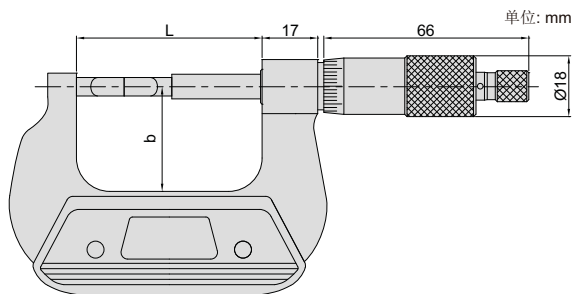

(mm)

型号	测量范围	类型	精度	L	b
3232-25AC	0-25mm	A	4μm	57	32
3232-50AC	25-50mm	A	4μm	82	44.5
3232-75AC	50-75mm	A	5μm	107	57
3232-100AC	75-100mm	A	5μm	132.6	69.5
3232-125AC	100-125mm	A	6μm	158	82
3232-150AC	125-150mm	A	6μm	183.4	94.5
3232-175AC	150-175mm	A	7μm	208.8	107
3232-200AC	175-200mm	A	7μm	234.2	129.6
3232-225AC	200-225mm	A	8μm	259.6	142.3
3232-250AC	225-250mm	A	8μm	285	155
3232-275AC	250-275mm	A	9μm	310.4	167.7
3232-300AC	275-300mm	A	9μm	336.5	177.8
3232-25BAC	0-25mm	B	4μm	57	32
3232-50BAC	25-50mm	B	4μm	82	44.5
3232-75BAC	50-75mm	B	5μm	107	57
3232-100BAC	75-100mm	B	5μm	132.6	69.5
3232-125BAC	100-125mm	B	6μm	158	82
3232-150BAC	125-150mm	B	6μm	183.4	94.5
3232-175BAC	150-175mm	B	7μm	208.8	107
3232-200BAC	175-200mm	B	7μm	234.2	129.6
3232-225BAC	200-225mm	B	8μm	259.6	142.3
3232-250BAC	225-250mm	B	8μm	285	155
3232-275BAC	250-275mm	B	9μm	310.4	167.7
3232-300BAC	275-300mm	B	9μm	336.5	177.8

- 符合JJG外径千分尺国家计量检定规程
- 用于测量狭窄凹槽的直径等
- 分度值: 0.01mm
- 直进式, 测头不旋转
- 棘轮测力
- 配标准杆(除0-25mm外)

