

直进式螺纹千分尺


测头不旋转





3281-25AC
(测头选配)



3281-S25AC
(测头标配)



- 符合JYG螺纹千分尺检定规程
- 用于测量螺纹中径
- 分度值: 0.01mm
- 直进式, 测头不旋转
- 棘轮测力
- 配60°标准杆(除0-25mm外)
- 可选附件: 55°标准杆, 测头(7381系列)

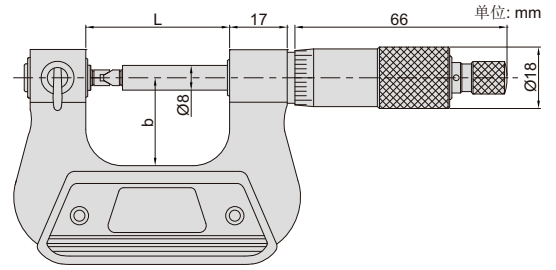

测头选配 (mm)

型号	测量范围	L	b	55°标准杆(选配)
3281-25AC	0-25mm	42	26	-
3281-50AC	25-50mm	67	38	3281-SP1
3281-75AC	50-75mm	92	50	3281-SP2
3281-100AC	75-100mm	117.6	62	3281-SP3
3281-125AC	100-125mm	143	70	3281-SP4
3281-150AC	125-150mm	168.2	82	3281-SP5
3281-175AC	150-175mm	192	94.5	3281-SP6
3281-200AC	175-200mm	217	107	3281-SP7
3281-225AC	200-225mm	242	130	3281-SP8
3281-250AC	225-250mm	267	142	3281-SP9
3281-275AC	250-275mm	291	155	3281-SP10
3281-300AC	275-300mm	317	167	3281-SP11

测头标配 (mm)

型号	测量范围	L	b	测头标配	55°标准杆(选配)
3281-S25AC	0-25mm	42	26	标配6对测头: 公制和美标螺纹测头 (60°牙型) 0.4-0.5mm/64-48TPI 0.6-0.9mm/44-28TPI 1-1.75mm/24-14TPI 2-3mm/13-9TPI 3.5-5mm/8-5TPI 5.5-7mm/4.5-3.5TPI	-
3281-S50AC	25-50mm	67	38		3281-SP1
3281-S75AC	50-75mm	92	50		3281-SP2
3281-S100AC	75-100mm	117.6	62		3281-SP3
3281-S125AC	100-125mm	143	70		3281-SP4
3281-S150AC	125-150mm	168.2	82		3281-SP5
3281-S175AC	150-175mm	192	94.5		3281-SP6
3281-S200AC	175-200mm	217	107		3281-SP7
3281-S225AC	200-225mm	242	130		3281-SP8
3281-S250AC	225-250mm	267	142		3281-SP9
3281-S275AC	250-275mm	291	155		3281-SP10
3281-S300AC	275-300mm	317	167	3281-SP11	

安装测头后精度 (mm)

螺距	测量范围							
	0-25	25-50	50-75	75-100	100-125	125-200	200-225	225-300
0.4~0.5	±0.01	-	-	-	-	-	-	-
0.6~0.8	±0.01	±0.013	-	-	-	-	-	-
1~1.25	±0.012	±0.015	±0.017	±0.017	-	-	-	-
1.5~2.0	±0.014	±0.017	±0.019	±0.019	±0.020	±0.023	±0.025	±0.028
2.5~3.5	±0.016	±0.019	±0.021	±0.021	±0.023	±0.025	±0.028	±0.031
4.0~7.0	-	±0.021	±0.023	±0.023	±0.025	±0.028	±0.031	±0.033