


数据  
传输

IP65  
防尘防水

# 数显花键千分尺


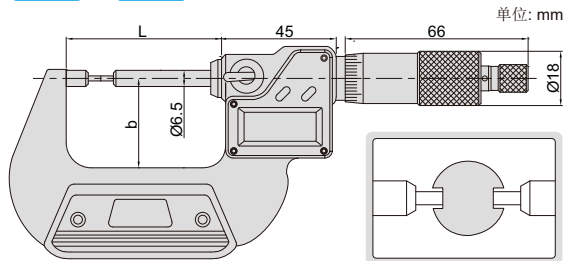


(mm)

3533-25BAC

型号	测量范围	类型	精度	L	b
3533-25AC	0-25mm/0-1"	A	±4μm	57	32
3533-50AC	25-50mm/1-2"	A	±4μm	82	44.5
3533-75AC	50-75mm/2-3"	A	±5μm	107	57
3533-100AC	75-100mm/3-4"	A	±5μm	132.6	69.5
3533-125AC	100-125mm/4-5"	A	±6μm	158	82
3533-150AC	125-150mm/5-6"	A	±6μm	183.4	94.5
3533-175AC	150-175mm/6-7"	A	±7μm	208.8	107
3533-25BAC	0-25mm/0-1"	B	±4μm	57	32
3533-50BAC	25-50mm/1-2"	B	±4μm	82	44.5
3533-75BAC	50-75mm/2-3"	B	±5μm	107	57
3533-100BAC	75-100mm/3-4"	B	±5μm	132.6	69.5
3533-125BAC	100-125mm/4-5"	B	±6μm	158	82
3533-150BAC	125-150mm/5-6"	B	±6μm	183.4	94.5
3533-175BAC	150-175mm/6-7"	B	±7μm	208.8	107

- 符合企业标准
- 用于测量花键轴、槽和键沟
- 分辨率: 0.001mm/0.00005"
- 防尘/防水等级: IP65
- 按键: 开/关, 初始值设置, 公/英制转换, 数据输出
- 数据传输
- 自动关机
- 棘轮测力
- 硬质合金测量面
- 配标准杆(除0-25mm/0-1"外)
- 可选附件: 数据传输线(型号7315-31, 7302-30)



单位: mm