

数显鸭嘴千分尺


测头不旋转

数据传输



3583-25AC

- 符合企业标准
- 分辨率: 0.001mm/0.00005"
- 直进式, 测头不旋转
- 按键: 开/关, 初始值设置, 公/英制转换, 数据输出
- 带数据传输
- 自动关机
- 棘轮测力
- 配标准杆(除0-25mm/0-1"外)
- 可选附件: 数据传输线(型号7315-31, 7302-30)

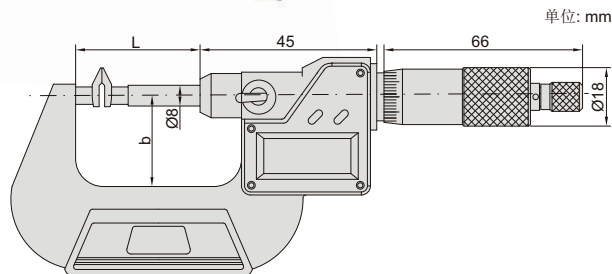

(mm)

型号	测量范围	精度	L	a	b	c	R	D
3583-25AC	0-25mm/0-1"	±4μm	43	6.5	32	5	10	8
3583-50AC	25-50mm/1-2"	±4μm	85	6.5	44.5	5	10	8
3583-75AC	50-75mm/2-3"	±5μm	110	6.5	57	5	10	8
3583-100AC	75-100mm/3-4"	±5μm	135	6.5	70	5	10	8
3583-125AC	100-125mm/4-5"	±6μm	160	11.5	86	8	15	12
3583-150AC	125-150mm/5-6"	±6μm	186	11.5	94.5	8	15	12
3583-175AC	150-175mm/6-7"	±7μm	211	11.5	107	8	15	12
3583-200AC	175-200mm/7-8"	±7μm	236	11.5	120	8	15	12

