

直进式数显花键千分尺

←INSIZE→PLUS

直进式, 测头不旋转

测量速度快
套筒转动一圈, 测头进给2mm

注意: 标准杆选配

数据
传输



IP65
防尘防水

检验证书





- 符合企业标准
- 用于测量花键轴, 槽和键沟
- 可调分辨率: 0.01mm/0.0005", 0.001mm/0.00005", 0.0005mm/0.00002"
- 重复性: 1 μ m, 测力: 5-10N
- 棘轮套测力
- 直进式测头
- 套筒转动一圈, 测头进给2mm, 测量速度快
- 数据传输
- 按键功能: 公/英制切换, 最大/最小值跟踪, 预设值, 读数保持, 开关, 置零
- CR2032电池, 自动关机, 转动套筒开机
- 可选附件: 标准杆(型号7386), 数据传输线(型号7315-80, 7302-80)



3672-30A

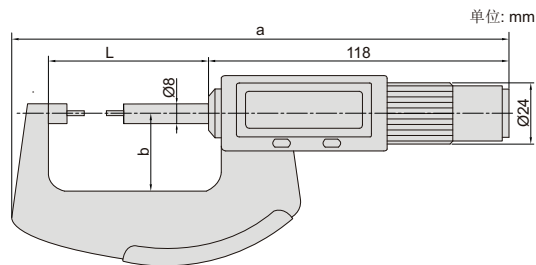

型号	测量范围	类型	精度	L	a	b
3672-30A*	0-30mm/0-1.18"	A	4 μ m	63mm	195mm	30mm
3672-55A*	25-55mm/0.98-2.17"	A	4 μ m	88mm	228mm	44mm
3672-30B*	0-30mm/0-1.18"	B	4 μ m	63mm	195mm	30mm
3672-55B*	25-55mm/0.98-2.17"	B	4 μ m	88mm	228mm	44mm
3672-30C*	0-30mm/0-1.18"	C	4 μ m	63mm	195mm	30mm
3672-55C*	25-55mm/0.98-2.17"	C	4 μ m	88mm	228mm	44mm
3672-30D*	0-30mm/0-1.18"	D	4 μ m	63mm	195mm	30mm
3672-55D*	25-55mm/0.98-2.17"	D	4 μ m	88mm	228mm	44mm



*带生产厂检验证书