

定制
可定制其它精度等级
可定制M3~M150mm范围内的任意尺寸




视频

螺纹定位规
INSIZE PLUS
德国制造




4662-12R

4662-3



应用

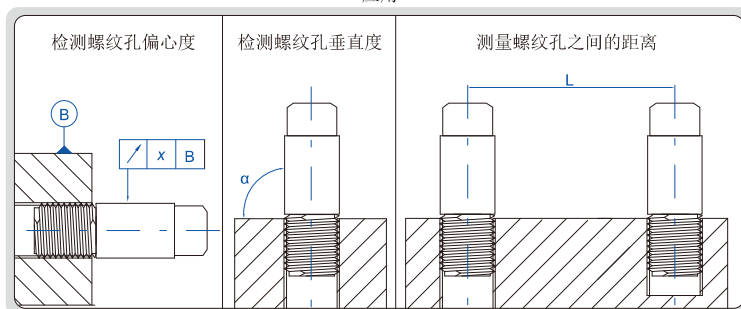

- 符合企业标准
- 硬度: HRC60-63

公制螺纹

(mm)

型号	螺纹规格	L	L1	L2	ØD
4662-3	M3×0.5-6H	29	8	6	3
4662-4	M4×0.7-6H	31.4	8	8.4	4
4662-5	M5×0.8-6H	32.6	8	9.6	5
4662-6	M6×1-6H	47	10	12	6
4662-8	M8×1.25-6H	50	10	15	8
4662-8P	M8×1-6H	47	10	12	8
4662-10	M10×1.5-6H	53	10	18	10
4662-10P	M10×1-6H	47	10	12	10
4662-12	M12×1.75-6H	56	10	21	12
4662-12P	M12×1-6H	47	10	12	12

公制螺纹

(mm)

型号	螺纹规格	L	L1	L2	ØD
4662-12R	M12×1.5-6H	53	10	18	12
4662-14	M14×2-6H	59	10	24	14
4662-14P	M14×1-6H	47	10	12	14
4662-14R	M14×1.5-6H	53	10	18	14
4662-16	M16×2-6H	59	10	24	16
4662-16P	M16×1-6H	47	10	12	16
4662-16R	M16×1.5-6H	53	10	18	16
4662-20	M20×2.5-6H	65	10	30	20
4662-20P	M20×1-6H	47	10	12	20
4662-20R	M20×1.5-6H	53	10	18	20

美标统一螺纹

(mm)

型号	螺纹规格	L	L1	L2	ØD
4662-61	No.6-32UNC	32.5	8	9.5	3.505
4662-62	No.6-40UNF	30.6	8	7.6	3.505
4662-81	No.8-32UNC	32.5	8	9.5	4.166
4662-82	No.8-36UNF	31.5	8	8.5	4.166
4662-101	No.10-24UNC	35.7	8	12.7	4.826
4662-102	No.10-32UNF	32.5	8	9.5	4.826
4662-121	No.12-24UNC	47.7	10	12.7	5.486
4662-122	No.12-28UNF	45.9	10	10.9	5.486
4662-123	No.12-32UNEF	44.5	10	9.5	5.486
4662-1B1	1/4-20UNC	50.2	10	15.2	6.350

美标统一螺纹

(mm)

型号	螺纹规格	L	L1	L2	ØD
4662-1B2	1/4-28UNF	45.9	10	10.9	6.350
4662-1B3	1/4-32UNEF	44.5	10	9.5	6.350
4662-3C1	3/8-16UNC	54.1	10	19.1	9.525
4662-3C2	3/8-24UNF	47.7	10	12.7	9.525
4662-3C3	3/8-32UNEF	44.5	10	9.5	9.525
4662-1A1	1/2-13UNC	58.4	10	23.4	12.700
4662-1A2	1/2-20UNF	50.2	10	15.2	12.700
4662-1A3	1/2-28UNEF	45.9	10	10.9	12.700
4662-3B1	3/4-16UNC	54.1	10	19.1	19.050
4662-3B3	3/4-20UNEF	50.2	10	15.2	19.050