


- 符合JJF三针国家计量标准, 精度1级
- 量针长度 $L=45\text{mm}$
- 材质: 硬质合金(0.3mm以下为轴承钢)
- 硬度HRA90
- 直径精度:  $\pm 0.5\mu\text{m}$
- 圆度:  $0.5\mu\text{m}$
- 带生产厂检验证书

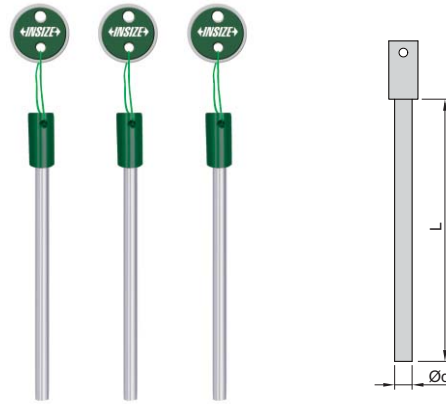

7394-35

型号	量针直径( $\varnothing d$ )
7394-1*	0.118mm
7394-2*	0.142mm
7394-3*	0.170mm
7394-4*	0.185mm
7394-5*	0.201mm
7394-6*	0.232mm
7394-7*	0.250mm
7394-8*	0.260mm
7394-9*	0.291mm
7394-10	0.343mm
7394-11	0.402mm
7394-12	0.433mm
7394-13	0.461mm
7394-14	0.511mm

型号	量针直径( $\varnothing d$ )
7394-15	0.572mm
7394-16	0.724mm
7394-17	0.796mm
7394-18	0.866mm
7394-19	1.008mm
7394-20	1.047mm
7394-21	1.157mm
7394-22	1.302mm
7394-23	1.441mm
7394-24	1.553mm
7394-25	1.591mm
7394-26	1.732mm
7394-27	1.833mm
7394-28	1.883mm

型号	量针直径( $\varnothing d$ )
7394-29	2.020mm
7394-30	2.050mm
7394-31	2.071mm
7394-32	2.217mm
7394-33	2.311mm
7394-34	2.595mm
7394-35	2.866mm
7394-36	2.886mm
7394-37	3.106mm
7394-38	3.177mm
7394-39	3.287mm
7394-40	3.310mm
7394-41	3.468mm
7394-42	3.550mm

型号	量针直径( $\varnothing d$ )
7394-43	3.580mm
7394-44	3.666mm
7394-45	4.091mm
7394-46	4.120mm
7394-47	4.141mm
7394-48	4.211mm
7394-49	4.400mm
7394-50	4.773mm
7394-51	5.150mm
7394-52	5.176mm
7394-53	5.493mm
7394-54	6.212mm
7394-55	6.585mm

\*材质为轴承钢

型号	量针直径( $\varnothing d$ )	适用的螺距
7394-60A*	0.170mm	0.2mm, 0.25mm, 0.3mm
7394-61A*	0.195mm	0.35mm
7394-62A*	0.220mm	0.4mm
7394-63A*	0.250mm	0.45mm
7394-64A*	0.290mm	0.5mm
7394-65A	0.335mm	0.6mm
7394-66A	0.390mm	0.7mm
7394-67A	0.455mm	0.75mm, 0.8mm
7394-68A	0.530mm	0.9mm

型号	量针直径( $\varnothing d$ )	适用的螺距
7394-69A	0.620mm	1.0mm
7394-70A	0.725mm	1.25mm
7394-71A	0.895mm	1.5mm
7394-72A	1.100mm	1.75mm, 2.0mm
7394-73A	1.350mm	2.5mm
7394-74A	1.650mm	3.0mm
7394-75A	2.050mm	3.5mm
7394-76A	2.550mm	4mm, 4.5mm
7394-77A	3.200mm	5mm, 5.5mm, 6mm

\*材质为轴承钢