


三坐标测量机测针

- 符合企业标准
- 圆度: 0.25 μ m



ISQ-20-071

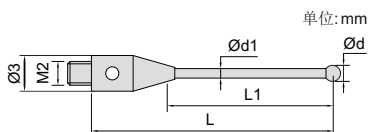

ISQ-25-125



M2测针 (mm)

型号	Ød	Ød1	L	L1*	测杆材质	测头材质
ISQ-20-002	1	0.7	10	4.5	不锈钢	红宝石
ISQ-20-006	2	1	10	6		
ISQ-20-010	3	1.5	10	10		
ISQ-20-021	2	1.4	20	14		
ISQ-20-025	3	1.5	20	17.5		
ISQ-20-027	4	2	20	20		
ISQ-20-052	0.5	0.3	10	3	硬质合金	
ISQ-20-071	1	0.7	20	12.5		
ISQ-20-105	2	1.5	30	22.5	陶瓷	
ISQ-20-120	3	2	30	27.5	陶瓷	
ISQ-20-201	4	3	50	50	碳纤维	


*L1为有效工作长度,是指从测头中心到测针锥柄与测头直径相等的截面之间的距离

M2测针延长杆 (mm)


型号	L	材质
ISQ-25-105	10	不锈钢
ISQ-25-110	20	
ISQ-25-125	30	陶瓷



ISQ-30-066

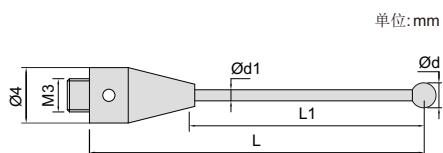

ISQ-35-110



M3测针 (mm)

型号	Ød	Ød1	L	L1*	测杆材质	测头材质
ISQ-30-001	1	0.7	21	4	硬质合金	红宝石
ISQ-30-003	2	1.4	21	8		
ISQ-30-005	3	1.5	21	12		
ISQ-30-031	2	1.5	30	22.5		
ISQ-30-066	3	2	50	42.5	陶瓷	
ISQ-30-080	6	4	75	75	碳纤维	


*L1为有效工作长度,是指从测头中心到测针锥柄与测头直径相等的截面之间的距离

M3测针延长杆 (mm)

型号	L	材质
ISQ-35-101	10	不锈钢
ISQ-35-105	20	
ISQ-35-110	35	
ISQ-35-115	50	陶瓷




ISQ-40-195

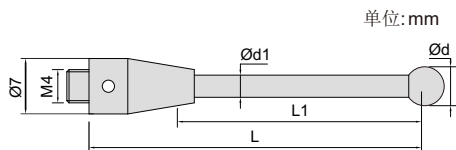

单位:mm



ISQ-45-025



单位:mm

M4测针

(mm)

型号	Ød	Ød1	L	L1*	测杆材质	测头材质
ISQ-40-113	3	2	18.5	13	不锈钢	红宝石
ISQ-40-208	6	4	50	36		
ISQ-40-106	1	0.7	19.5	4	硬质合金	
ISQ-40-109	2	1.4	19	8		
ISQ-40-141	1	0.7	20	10		
ISQ-40-195	2	1.5	50	40		
ISQ-40-202	4	2	50	38	陶瓷	
ISQ-40-173	5	4	50	34		
ISQ-40-179	6	4	50	36		
ISQ-40-222	6	4	75	63		
ISQ-40-240	5	4	100	84		
ISQ-40-245	6	4	100	86		

*L1为有效工作长度,是指从测头中心到测针锥柄与测头直径相等的截面之间的距离


M4测针延长杆

(mm)


型号	L	材质
ISQ-45-025	30	陶瓷
ISQ-45-028	50	



ISQ-50-059



单位:mm

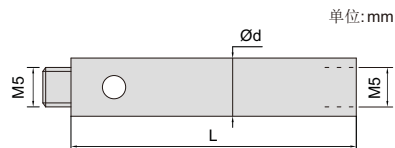

单位:mm

M5测针

(mm)

型号	Ød	Ød1	L	L1*	测杆材质	测头材质
ISQ-50-051	1	0.7	20	5	硬质合金	红宝石
ISQ-50-059	2	1.5	20	11		
ISQ-50-067	3	2	20	11		
ISQ-50-071	4	2	20	11		
ISQ-50-075	5	3	20	11		

*L1为有效工作长度,是指从测头中心到测针锥柄与测头直径相等的截面之间的距离

M5测针延长杆

(mm)

型号	L	Ød	材质
ISQ-55-012	20	10	不锈钢
ISQ-55-014	30	10	
ISQ-55-016	50	10	
ISQ-55-018	100	10	
ISQ-55-031	50	20	
ISQ-55-035	100	20	
ISQ-55-039	200	20	