

磁栅尺 (增量式)

IP65
防尘防水






读数头
LSK-B12

- 符合国家机械行业标准
- 非接触式测量, 智能提示灯
- 输出频率: 1000Hz (最高可定制8000Hz)
- 数据传输线线长: 0.5m (最长可定制15m)
- 防尘/防水等级: IP65

读数头技术参数

型号	分辨率	重复精度	最大速度	供电电压	电流	输出信号	输出接口
LSK-B10	0.1 μ m	\pm 0.5 μ m	5m/s	5V \pm 5%	<50mA	RS422	
LSK-B11	0.5 μ m	\pm 1 μ m					
LSK-B12	1 μ m	\pm 2 μ m					
LSK-B20	0.1 μ m	\pm 0.5 μ m					
LSK-B21	0.5 μ m	\pm 1 μ m					
LSK-B22	1 μ m	\pm 2 μ m					
LSK-B30	0.1 μ m	\pm 0.5 μ m					
LSK-B31	0.5 μ m	\pm 1 μ m					
LSK-B32	1 μ m	\pm 2 μ m					

单位: mm

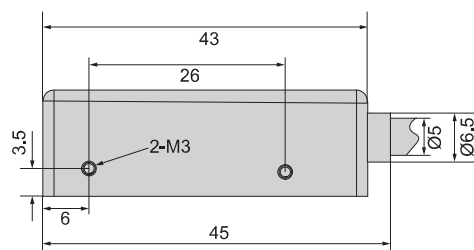


磁栅尺

型号	长度*	型号	长度*	型号	长度*
LSK-C1	1m	LSK-C10	10m	LSK-C19	19m
LSK-C2	2m	LSK-C11	11m	LSK-C20	20m
LSK-C3	3m	LSK-C12	12m	LSK-C25	25m
LSK-C4	4m	LSK-C13	13m	LSK-C30	30m
LSK-C5	5m	LSK-C14	14m	LSK-C35	35m
LSK-C6	6m	LSK-C15	15m	LSK-C40	40m
LSK-C7	7m	LSK-C16	16m	LSK-C45	45m
LSK-C8	8m	LSK-C17	17m	LSK-C50	50m
LSK-C9	9m	LSK-C18	18m		

* 长度可根据客户要求定制

磁栅尺技术参数

磁间距	2+2mm
磁栅精度	\pm 40 μ m
最大长度	50m

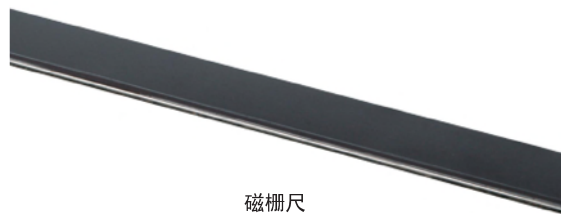

磁栅尺



贴尺器 (选配)



应用

可选配件

型号	名称	说明
LSK-B01	贴尺器	辅助安装磁栅尺