


# 钢量块套装



注意: 0级/2等量块的平面度不符合国标

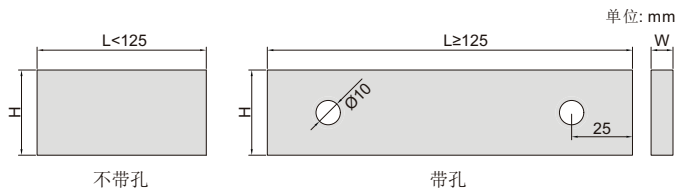

- 符合JJG量块国家计量检定规程
- 0级/2等量块研合性稍差
- L≥125mm带孔
- 带生产厂检验证书
- 0级/2等量块的平面度不符合国标

量块尺寸:

长度(L)	W	H
0.5≤L≤10mm	9mm	30mm
L>10mm	9mm	35mm



4100-87

每套块数	包含的量块			型号		
	长度(mm)	间隔(mm)	数量	0级/2等	1级/3等	2级/4等
122	1.0005		1	4100-122	4100-1122	4100-2122
	1.001-1.009	0.001	9			
	1.01-1.49	0.01	49			
	1.6-1.9	0.1	4			
	0.5-24.5	0.5	49			
	30-100	10	8			
	25-75	50	2			
112	1.0005		1	4100-112	4100-1112	4100-2112
	1.001-1.009	0.001	9			
	1.01-1.49	0.01	49			
	0.5-24.5	0.5	49			
	25-100	25	4			
103	1.005		1	4100-103	4100-1103	4100-2103
	1.01-1.49	0.01	49			
	0.5-24.5	0.5	49			
	25-100	25	4			
88	1.0005		1	4100-88	4100-188	4100-288
	1.001-1.009	0.001	9			
	1.01-1.49	0.01	49			
	0.5-9.5	0.5	19			
	10-100	10	10			
87	1.001-1.009	0.001	9	4100-87	4100-187	4100-287
	1.01-1.49	0.01	49			
	0.5-9.5	0.5	19			
	10-100	10	10			
83	0.5		1	4100-83	4100-183	4100-283
	1		1			
	1.005		1			
	1.01-1.49	0.01	49			
	1.5-1.9	0.1	5			
	2-9.5	0.5	16			
	10-100	10	10			

每套 块数	包含的量块			型号		
	长度(mm)	间隔(mm)	数量	0级/2等	1级/3等	2级/4等
76	1.005		1	<b>4100-76</b>	<b>4100-176</b>	<b>4100-276</b>
	1.01-1.49	0.01	49			
	0.5-9.5	0.5	19			
	10-40	10	4			
	50-100	25	3			
56	0.5		1	<b>4100-56</b>	<b>4100-156</b>	<b>4100-256</b>
	1.001-1.009	0.001	9			
	1.01-1.09	0.01	9			
	1.1-1.9	0.1	9			
	1-24	1	24			
	25-100	25	4			
47	1.005		1	<b>4100-47A</b>	<b>4100-147A</b>	<b>4100-247A</b>
	1.01-1.09	0.01	9			
	1.1-1.9	0.1	9			
	1-24	1	24			
	25-100	25	4			
47	1.005		1	<b>4100-47</b>	<b>4100-147</b>	<b>4100-247</b>
	1.01-1.19	0.01	19			
	1.2-1.9	0.1	8			
	1-9	1	9			
	10-100	10	10			
46	1.001-1.009	0.001	9	<b>4100-46</b>	<b>4100-146</b>	<b>4100-246</b>
	1.01-1.09	0.01	9			
	1.1-1.9	0.1	9			
	1-9	1	9			
	10-100	10	10			
34	1.0005		1	<b>4100-34</b>	<b>4100-134</b>	<b>4100-234</b>
	1.001-1.009	0.001	9			
	1.01-1.09	0.01	9			
	1.1-1.9	0.1	9			
	1-5	1	5			
	10		1			
32	1.005		1	<b>4100-32</b>	<b>4100-132</b>	<b>4100-232</b>
	1.01-1.09	0.01	9			
	1.1-1.9	0.1	9			
	1-9	1	9			
	10-30	10	3			
	50		1			
9	1.001-1.009	0.001	9	<b>4100-9</b>	<b>4100-19</b>	<b>4100-29</b>
9	0.991-0.999	0.001	9	<b>4100-9A</b>	<b>4100-19A</b>	<b>4100-29A</b>
8	125-175	25	3	<b>4100-8</b>	<b>4100-18</b>	<b>4100-28</b>
	200-250	50	2			
	300-500	100	3			